

Model: SK 320 (NEO)**T/S Parameters**

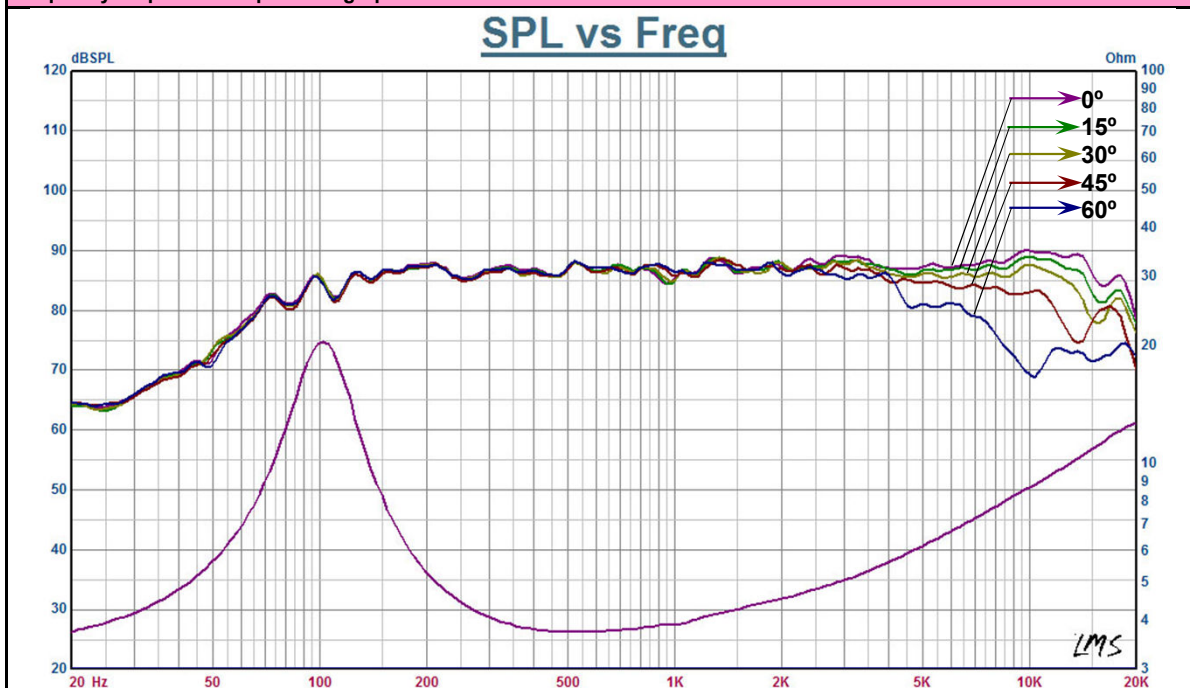
Normal Impedance	Znom	4 ohm
DC resistance	Re	3.5 ohm
Voice coil inductance	Le	0.28 mH @1kHz
Resonance frequency	Fs	90 Hz
Mechanical Q factor	Qms	4.93
Electrical Q factor	Qes	0.44
Total Q factor	Qt	0.41
Moving mass(incl.air load)	Mms	2.5 g
Suspension compliance	Cms	1.26 mm/N
Effective dome diameter	d	6.3 cm
Effective piston area	Sd	31.2 sq.cm
Equivalent volume	Vas	1.63 L
Force factor	Bl	3.36Tm

Magnet and Voice Coil Properties

Magnet size		55*3mm
Voice coil diameter	Dc	20.4 mm
Winding height	Hc	9.0 mm
Linear excursion P-P	Xm	2.5 mm
Max excursion P-P		14 mm
Normal long term Power	Pnom	15 W
Instant(10ms) Max Power	Pmax	30 W

Other Properties

Sound Pressure Level/1m/1W	SPL	86 dB
Recommended range		F0-18k Hz
Net. weight		0.33 kg
Overall dimension		Φ90.4*39.6mm

Frequency response & Impedance graph**Outline drawing**